


MiniPod Bluetooth MKII

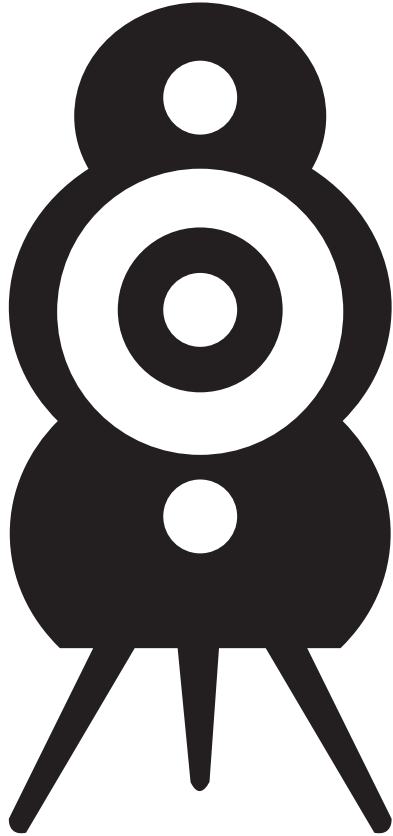

Forhandler:
AV-Concept aps
Tlf. 30321889
Mail: info@av-concept.dk
www.av-concept.dk

www.podspeakers.com
We accept no liability for printing errors.
Specifications are subject to change without notice.

DATASHEET

PACKAGING

Size (WxHxD): 375 x 280 x 260 mm
Weight (Gross): 5.6 Kgs

SPEAKER MECHANICAL DETAILS

Weight (Net): 3.4 Kgs
Dimensions (WxHxD): 210 x 340 x 200 mm
Housing material: ABS + Fibre material
Speaker terminal type: Push Type. Ø4 mm cable max
(to passive speaker only!)

SPEAKER ACOUSTIC DETAILS

Bass Reflex system: Engineered Air Port – Front faced
Bass Driver: 5.25" Kevlar driver
Tweeter Driver: 25mm cloth cone
Frequency Range: (\pm 3 dB): 58Hz - 22.000Hz
Frequency Range: (\pm 6 dB): 48Hz - 22.000Hz
Sensitivity: 86 dB
Nominal Impedance: 6 Ohm
EQ modes: Optimal->FLAT->Boost

GENEREL

Power input: 100-240V (AC). Built-in SMPS
Power consumption: Network standby mode <1.1W
– Standby mode <0.4W
Amplifier output: 2x25W Class D amplifier with DSP. (TAS5727)
THD: <1% @ rated power output
Bluetooth module: Qualcomm/CSR CS8670 TrueWireless

BLUETOOTH INFORMATION

Bluetooth version: 4.0
Supported profiles: A2DP, AVRCP, SBC (audio codec)

CONNECTORS

AC Power input
USB port for service only
AUX-In (analogue, mini-jack)
OPT-In (toslink)

INCLUDED ACCESSORIES

- Rubber feets (2 different types, 6 pcs total)
- User Guides
- AC power cables (4 types for EU, UK, US and CHINA)

PODSPEAKERS 